

WPC CEILING

Installation

Dongguan Linhong Building Decoration Material Co., Ltd

Leading WPC product(wall panel, decking, ceiling, tube) manufacturer in China

Tel: +86-18029120121

Email: dylan@naikemu.com

Indoorwpc Ceiling Installation



Main components:



Joist Expansion bolt Nuts Adjustable hanger



Cutting saw



Protective eye mask



Indoorwpc wall ceiling

Installation Procedure


1. Data calculation:

Draw the sketch plan according to the situation of the room (shape, size etc.)
Choose the article no., color and space of the ceiling .
Design out the best matching plan.
Calculate out the using quantity of auxiliary materials and accessories such as joist, boom, and moulding.

2. Ceiling pretreatment

Pretreat the ceiling before installation to determine the height of the hanger and the position of the ventilation window. And then pre-embed the electric wire to determine the route, check if there is leakage on the pipeline and leakage of electricity.

3. Installation

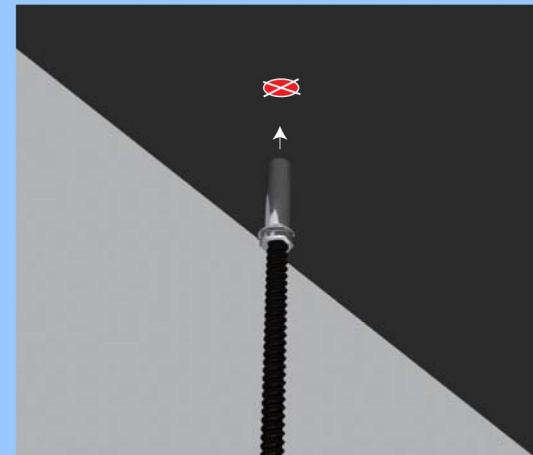


3.1 Use electric hammer (12 bit) drill hole (centered on the point of the cross mark).

After drilling, check if the electric line works well to avoid the damage to the electricity when drilling.



Indoorwpc Ceiling Installation

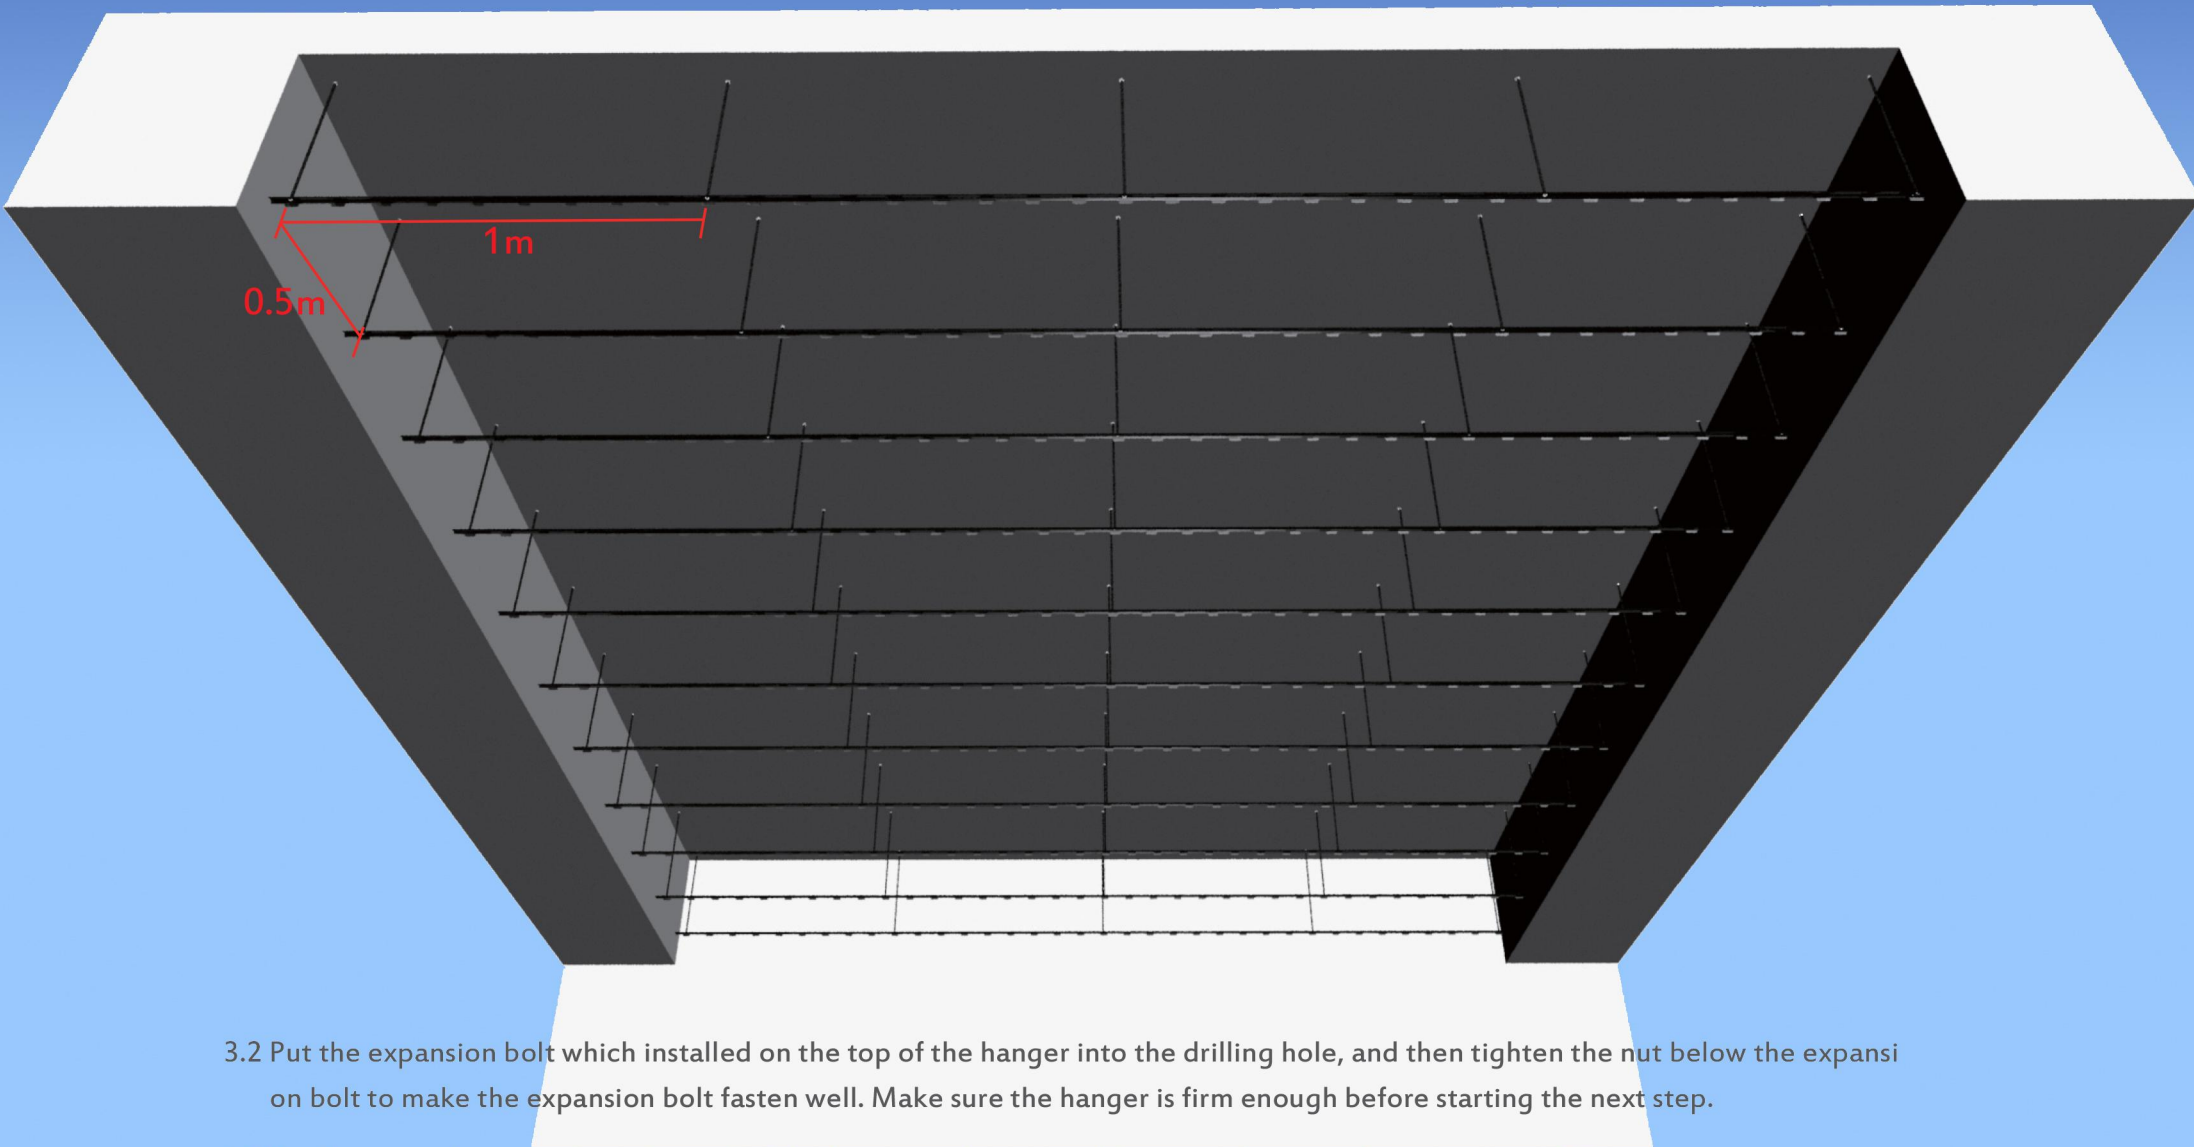


3.2 Put the expansion bolt which installed on the top of the hanger into the drilling hole, and then tighten the nut below the expansion bolt to make the expansion bolt fasten well. Make sure the hanger is firm enough before starting the next step.

3.3 Fix the painted joist on the other end of the hanger with nuts, and the space between the two joists is 0.5m.




Indoorwpc Ceiling Installation

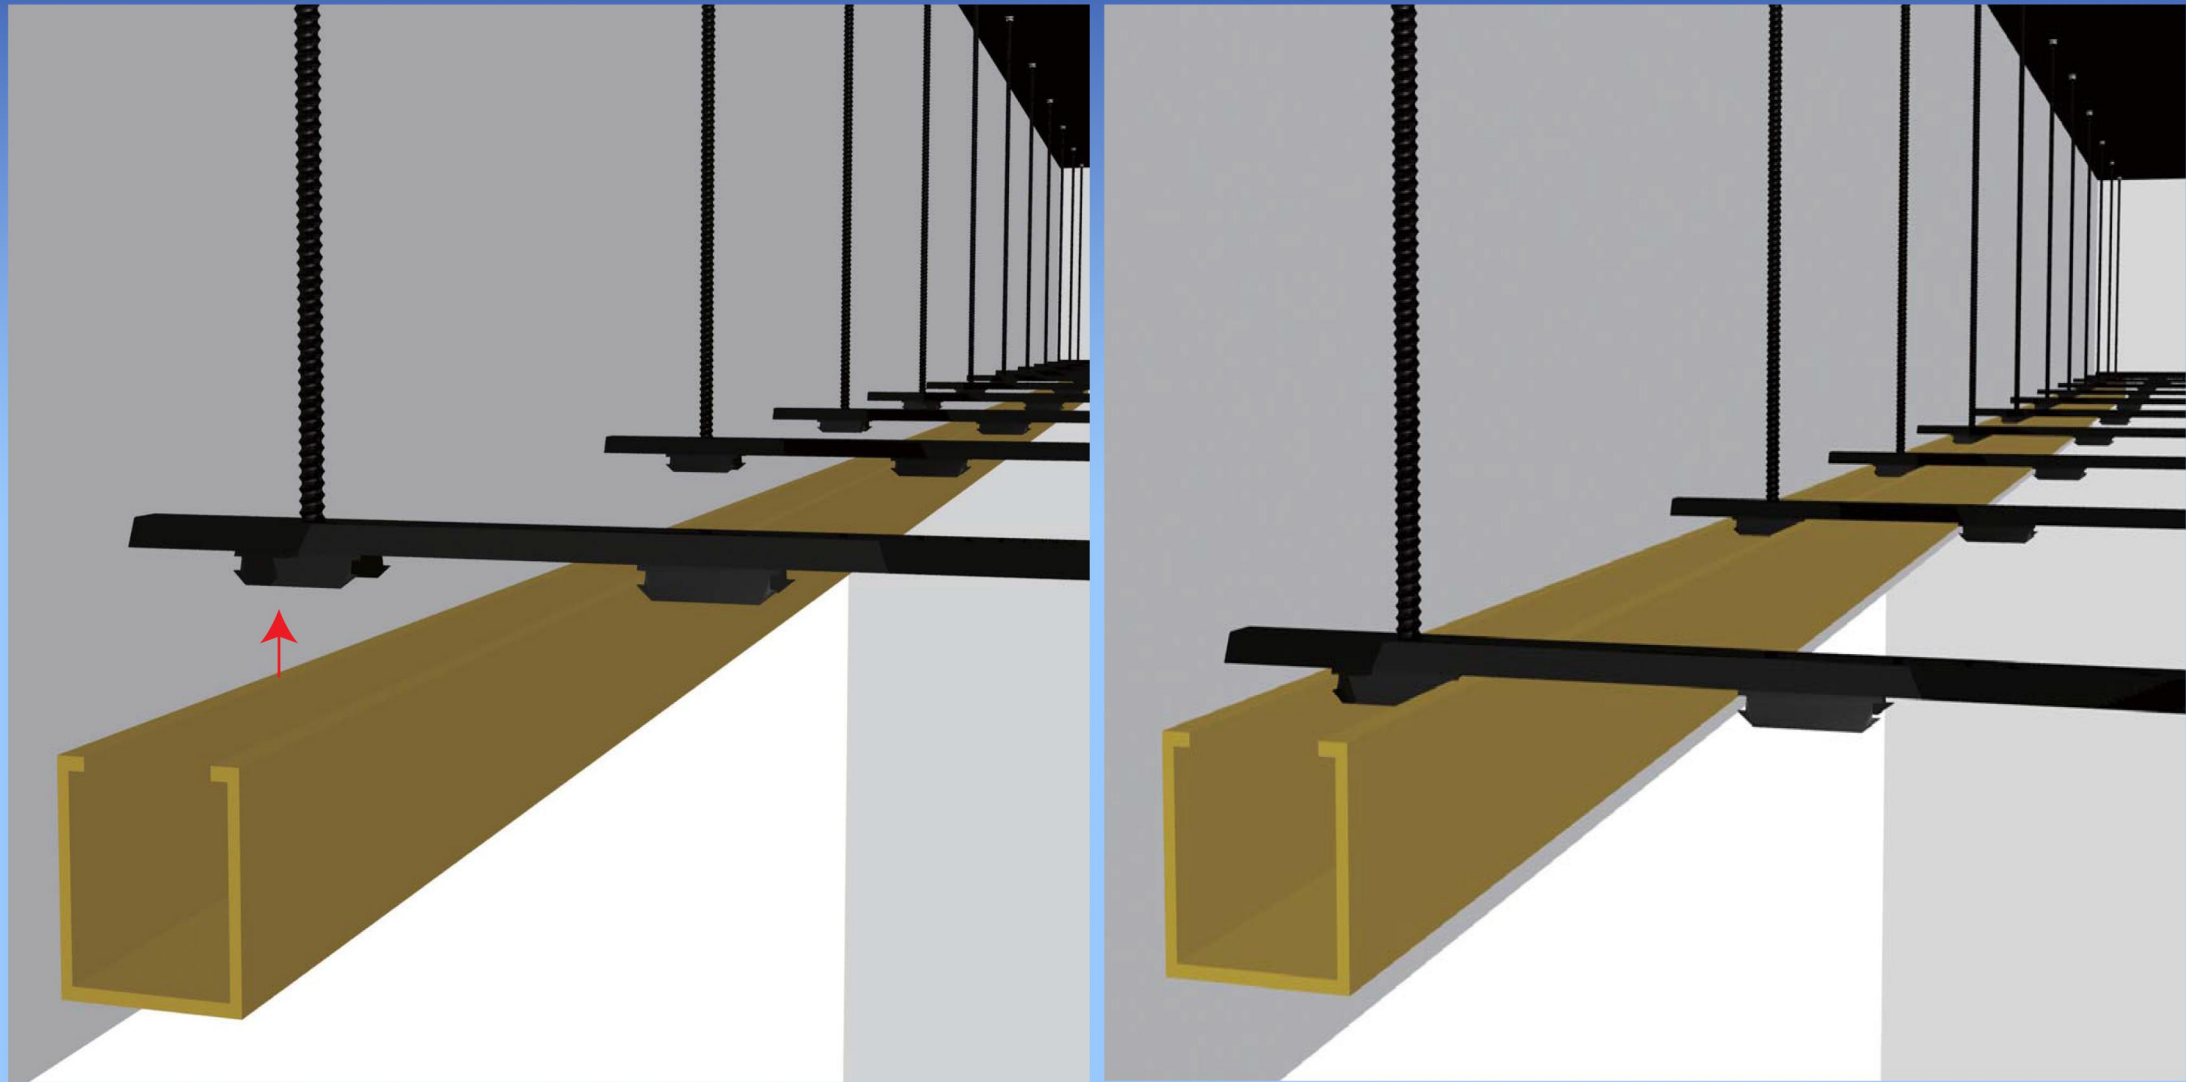

3.4 Install the ceiling on the joist in turn to complete the installation.




Indoorwpc Ceiling Installation

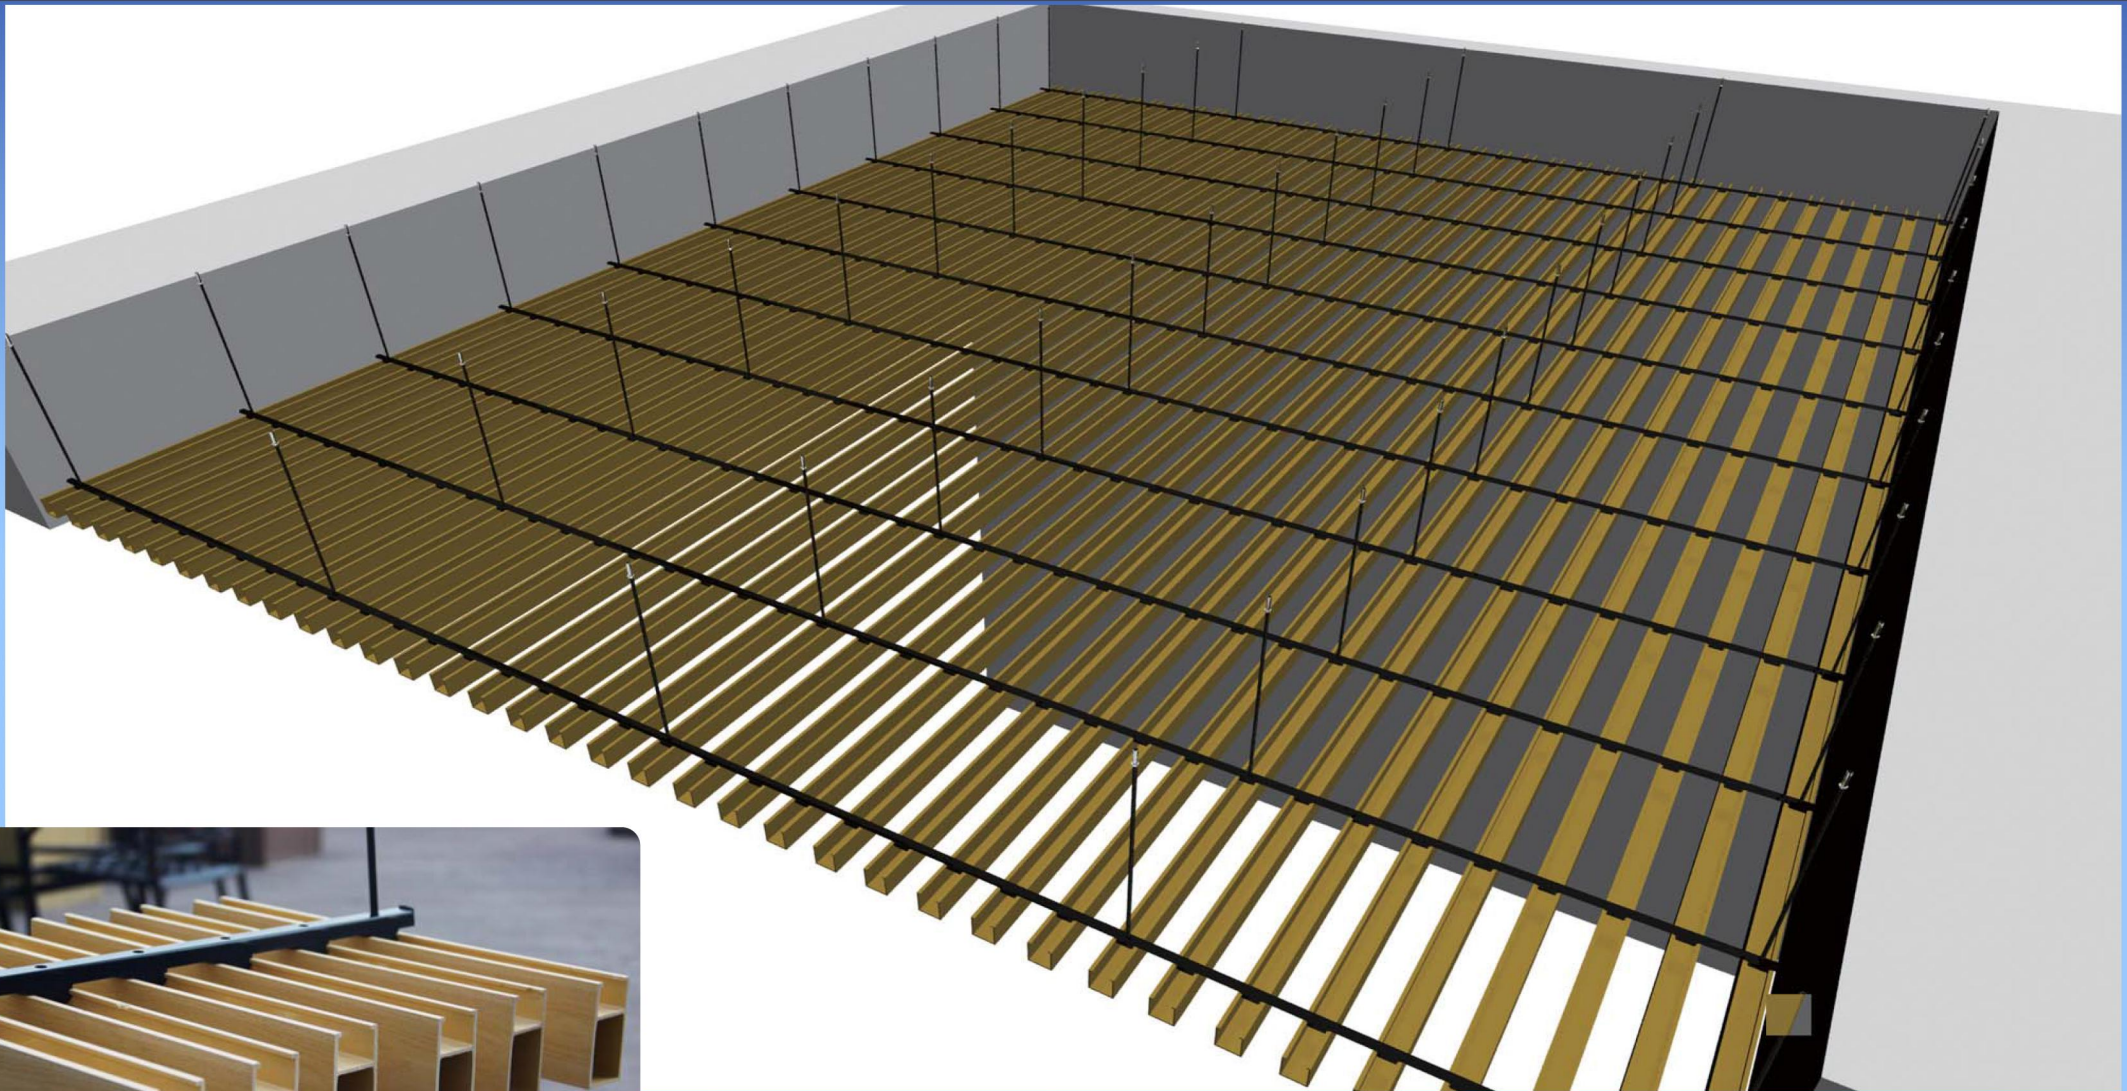

3.5 The installation is complete



Indoorwpc Ceiling Installation

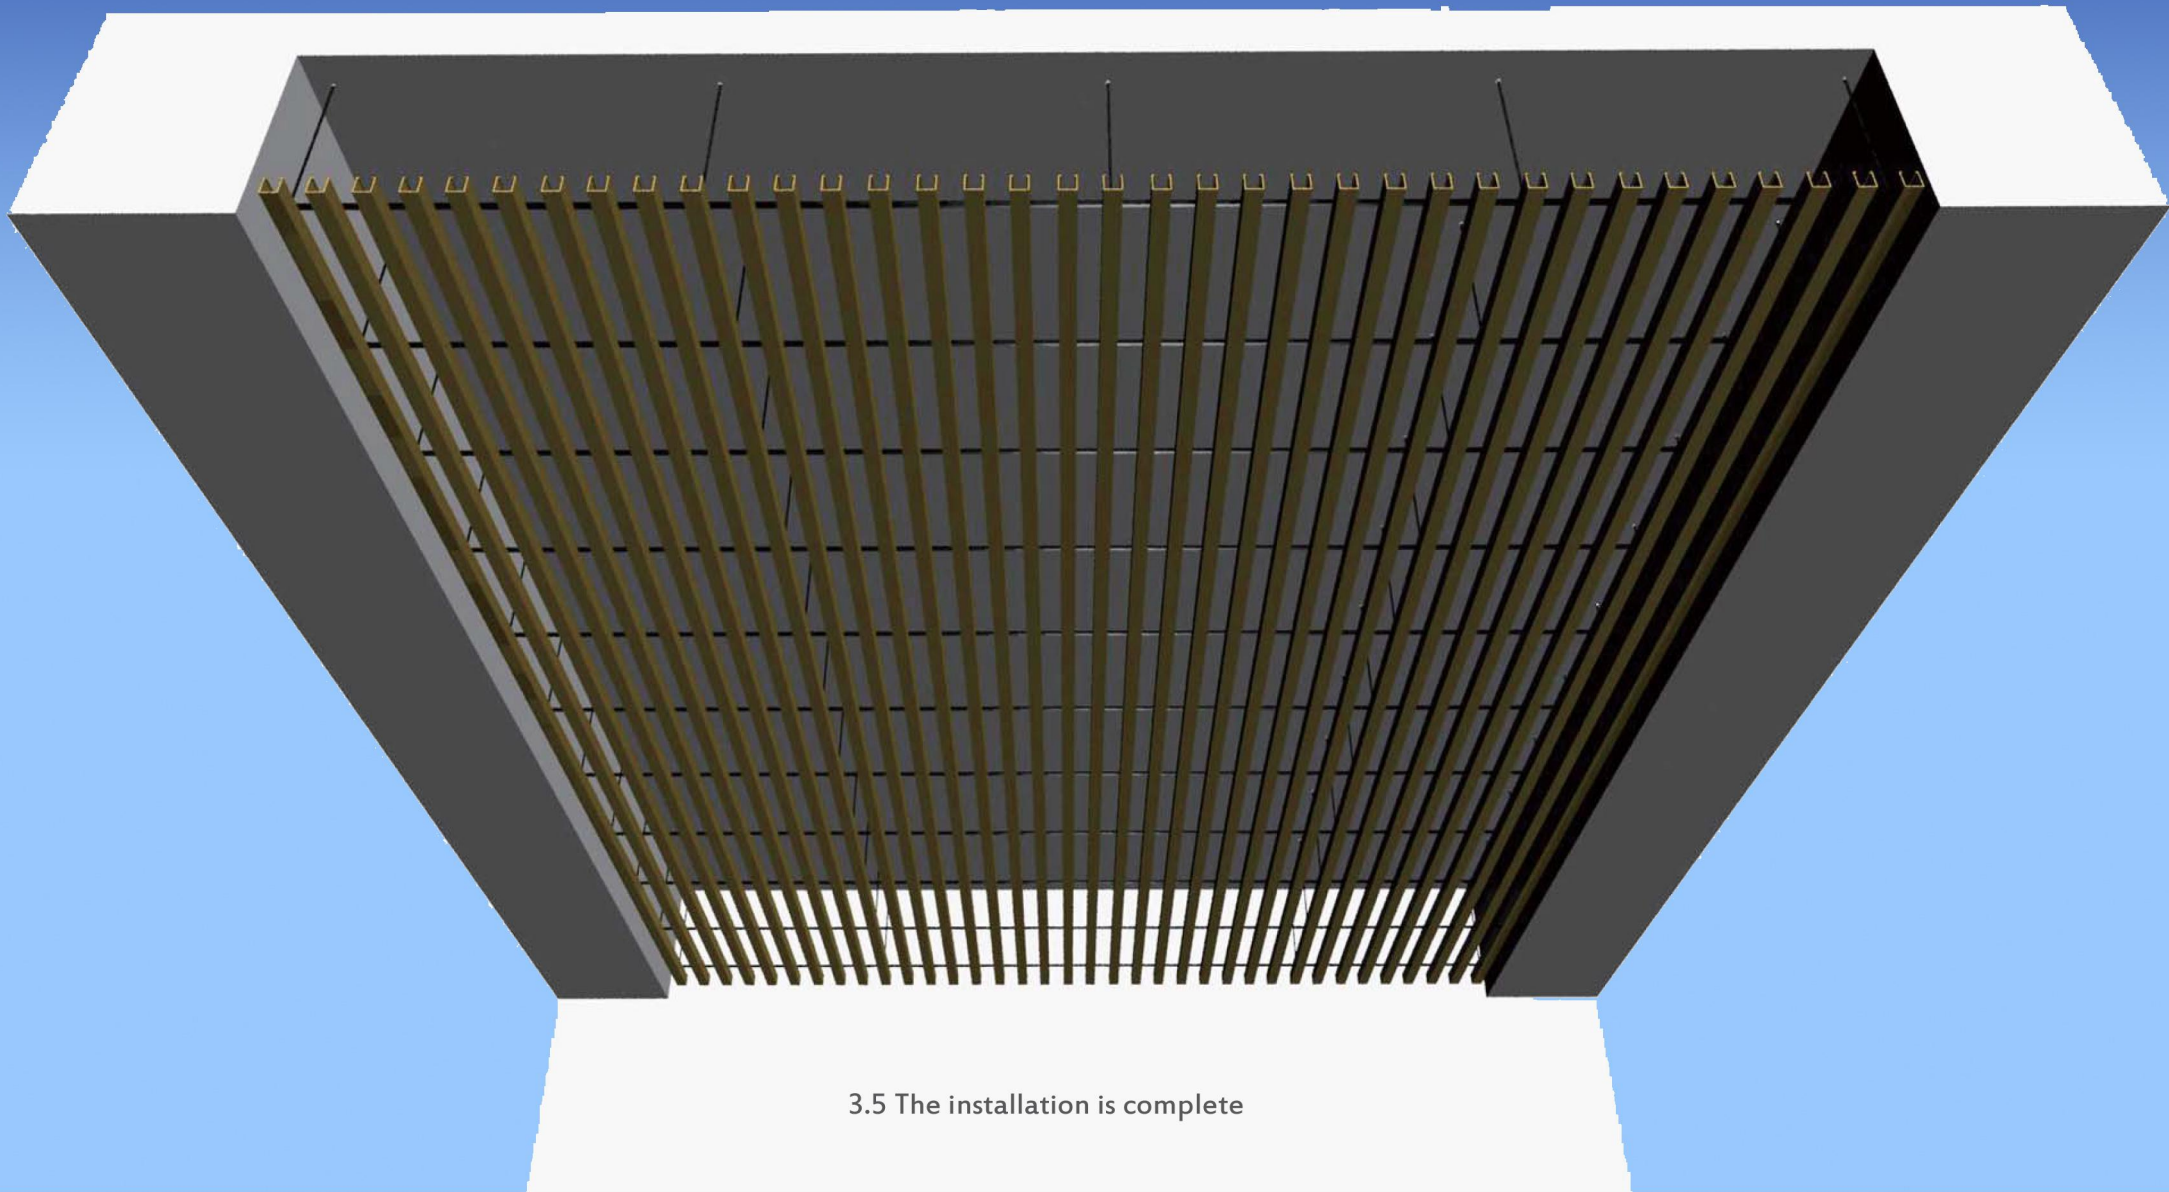

3.5 The installation is complete

